FRONT OF CAB†
BG2S CONFIGURATION

FIRETECH ®
BY HIVIZ LED LIGHTING

FILL OUT YOUR PART NUMBER HERE:

3A. ONE COLOR LED OPT. — **1. EXTRUSION** — **2. FIXTURE LENGTH** — **3B. CUSTOM COLOR OPT.** — **4. HOUSING COLOR** — **5. MARKER LIGHTS**

FT-BG2S [____] - [_____] - [_____] - [_____] - [____] - [_____]

IF 3B IS CHOSEN: REMOVE THIS SECTION

IF 3A IS CHOSEN: REMOVE THIS SECTION

IF 3B IS CHOSEN: REMOVE THIS SECTION

1. CHOOSE EXTRUSION

Find your truck manufacturer and model here, then write the corresponding extrusion initial in the **_BLUE SECTION_** of the part number.

R2C

Pierce - Saber & Enforcer (48"-80")

R3

Pierce - Arrow XT (48"-72")

Spartan - Metro Star (48"-72")

Spartan - Gladiator (48"-80")

Ferrara - Inferno, Igniter, Cinder, Ultra (48"-72")

Seagrave - Marauder, Capitol, Attacker (48"-80")

KME - 96" Severe Service (48"-72")

KME - Predator & Panther (48"-80")

HME Ahrens-Fox - AF1 (48"-80")

D45

E-One - Cyclone (48"-80")

E-One - Typhoon (48"-72")

R275C

Pierce - Impel & Velocity (48"-80")

RWAR

Rosenbauer - Warrior (60" or 80")

RAVG

Rosenbauer - Avenger (60" or 80")

RCOM

Rosenbauer - Commander (60" or 80")

MON

Sutphen - Monarch (48"-80")

†Configuration process varies by location

2. CHOOSE FIXTURE LENGTH

Choose the length fixture you want (fixtures are measured in inches) and write the number in the **_BLACK SECTION_** of the part number (refer to your make/model in section one for your fixture length options).

48" = 11 Modules

72" = 17 Modules*

80" = 19 Modules

* 3 or 5 marker light options available for select 72" fixtures
60" Custom size available for Rosenbauer Warrior, Avenger, and Commander

CUSTOM SIZES AVAILABLE

PLEASE CONTACT A FIRETECH TEAM MEMBER TO DISCUSS.

📞 **(703) 662-3458**   ✉ **firetech@hivizleds.com**

3A. CHOOSE ONE COLOR OPT.

If you would like your entire BG2S fixture to be one color: pick your color and write it's corresponding initial in the ***FIRST RED SECTION*** of the part number. *Remove second red section.*

LEAVE BLANK for Amber

B for Blue

R for Red

OR

3B. CHOOSE CUSTOM COLOR OPT.

If you would like each module to be a different color: Remove the first red section and use the ***SECOND RED SECTION*** of the part number. In the second red section you will write the initial for the color you want from left to right for each module in the fixture (please add in Amber for marker light colors if you want marker lights, in the part number *leave off section 5*).
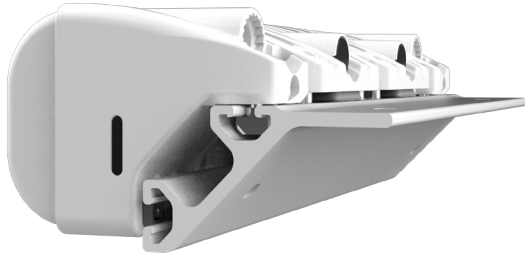
R B A R B A R B A R B

Part Number Example from BG2 Above*:
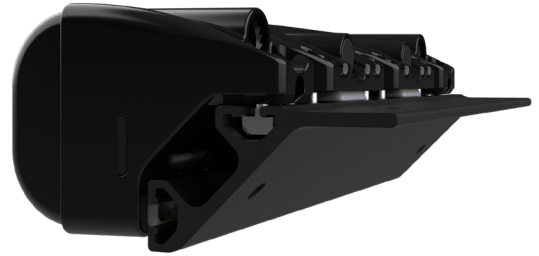
FT-BG2-D45-48-RBARBARBARB-W

* No need to add ML or ML3 at the end of a custom color part number

4. CHOOSE HOUSING COLOR

Choose the color housing/extrusion of your fixture and write the initial in the **_ORANGE SECTION_** of the part number.

OR

W for White

B for Black

5. CHOOSE MARKER LIGHTS

Based on your choice in section 2 please notate if your fixture will have 3 or 5 marker lights and write the initial in the **_GREEN SECTION_**. If you choose to have no marker lights, _remove section from part number._

ML3 = 3 Marker Lights

ML = 5 Marker Lights

LEAVE BLANK = No Marker Lights

HIVIZ LIGHTING INC.
149 Twin Springs Road
Hendersonville, NC 28792
(703) 662-3458
firetech@hivizleds.com
www.hivizleds.com