




# DOUBLE STACK MINIBROW LIGHTS

LOW PROFILE SCENE LIGHT BARS



## KEY FEATURES:

- Eight Length Choices
- All Aluminum Extrusion
- Multiple Mounting Options

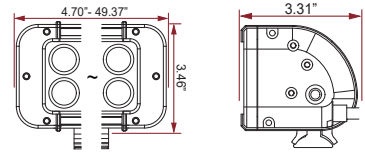

- 5" **FT-MB-2.3-\*B** | 6 LEDES | 6,336 RAW LM
- 8" **FT-MB-2.6-\*B** | 12 LEDES | 6,336 RAW LM
- 11" **FT-MB-2.9-\*B** | 18 LEDES | 9,504 RAW LM
- 18" **FT-MB-2.15-\*B** | 30 LEDES | 15,840 RAW LM

- 21" **FT-MB-2.18-\*B** | 36 LEDES | 19,008 RAW LM
- 30" **FT-MB-2.27-\*B** | 54 LEDES | 28,512 RAW LM
- 40" **FT-MB-2.36-\*B** | 72 LEDES | 38,016 RAW LM
- 50" **FT-MB-2.45-\*B** | 90 LEDES | 47,520 RAW LM

## ABOUT THE MINIBROW LIGHT

The MiniBrow Series uses the same core extrusion technology as the FireTech Brow Light, but are offered as single-circuit solutions for use in virtually any other area of a fire apparatus. This means you can have the reliable and bright light of our brow lights wherever you choose to mount the MiniBrow series on your vehicle. With two separate mounting options, trunion and pedestal, you can be sure that your scene lighting solution will fit on your apparatus.

Model / Order Number	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-2.3-S-B	6 LED MiniBrow. 4.6" length. 10 degree spot optic configuration. Black housing.	3,168	2,217.60	30W	2.5A	Spot	5"	1
FT-MB-2.3-S-W	6 LED MiniBrow. 4.6" length. 10 degree spot optic configuration. White housing.	3,168	2,217.60	30W	2.5A	Spot	5"	1
FT-MB-2.3-F-B	6 LED MiniBrow. 4.6" length. 60 degree flood optic configuration. Black housing.	3,168	2,217.60	30W	2.5A	Flood	5"	1
FT-MB-2.3-F-W	6 LED MiniBrow. 4.6" length. 60 degree flood optic configuration. White housing.	3,168	2,217.60	30W	2.5A	Flood	5"	1
FT-MB-2.3-FT-B	6 LED MiniBrow. 4.6" length. FireTech Combination spot and flood optic configuration. Black housing.	3,168	2,217.60	30W	2.5A	Combo	5"	1
FT-MB-2.3-FT-W	6 LED MiniBrow. 4.6" length. FireTech Combination spot and flood optic configuration. White housing.	3,168	2,217.60	30W	2.5A	Combo	5"	1
FT-MB-2.6-S-B	12 LED MiniBrow. 8" length. 10 degree spot optic configuration. Black housing.	6,336	4,435.20	60W	5A	Spot	8"	2
FT-MB-2.6-S-W	12 LED MiniBrow. 8" length. 10 degree spot optic configuration. White housing.	6,336	4,435.20	60W	5A	Spot	8"	2
FT-MB-2.6-F-B	12 LED MiniBrow. 8" length. 60 degree flood optic configuration. Black housing.	6,336	4,435.20	60W	5A	Flood	8"	2
FT-MB-2.6-F-W	12 LED MiniBrow. 8" length. 60 degree flood optic configuration. White housing.	6,336	4,435.20	60W	5A	Flood	8"	2
FT-MB-2.6-FT-B	12 LED MiniBrow. 8" length. FireTech Combination spot and flood optic configuration. Black housing.	6,336	4,435.20	60W	5A	Combo	8"	2
FT-MB-2.6-FT-W	12 LED MiniBrow. 8" length. FireTech Combination spot and flood optic configuration. White housing.	6,336	4,435.20	60W	5A	Combo	8"	2
FT-MB-2.9-S-B	18 LED MiniBrow. 11" length. 10 degree spot optic configuration. Black housing.	9,504	6,652.80	90W	7.5A	Spot	11"	2
FT-MB-2.9-S-W	18 LED MiniBrow. 11" length. 10 degree spot optic configuration. White housing.	9,504	6,652.80	90W	7.5A	Spot	11"	2
FT-MB-2.9-F-B	18 LED MiniBrow. 11" length. 60 degree flood optic configuration. Black housing.	9,504	6,652.80	90W	7.5A	Flood	11"	2
FT-MB-2.9-F-W	18 LED MiniBrow. 11" length. 60 degree flood optic configuration. White housing.	9,504	6,652.80	90W	7.5A	Flood	11"	2
FT-MB-2.9-FT-B	18 LED MiniBrow. 11" length. FireTech Combination spot and flood optic configuration. Black housing.	9,504	6,652.80	90W	7.5A	Combo	11"	2
FT-MB-2.9-FT-W	18 LED MiniBrow. 11" length. FireTech Combination spot and flood optic configuration. White housing.	9,504	6,652.80	90W	7.5A	Combo	11"	2
FT-MB-2.15-S-B	30 LED MiniBrow. 17.5" length. 10 degree spot optic configuration. Black housing.	15,840	11,088	150W	12.5A	Spot	18"	2
FT-MB-2.15-S-W	30 LED MiniBrow. 17.5" length. 10 degree spot optic configuration. White housing.	15,840	11,088	150W	12.5A	Spot	18"	2
FT-MB-2.15-F-B	30 LED MiniBrow. 17.5" length. 60 degree flood optic configuration. Black housing.	15,840	11,088	150W	12.5A	Flood	18"	2
FT-MB-2.15-F-W	30 LED MiniBrow. 17.5" length. 60 degree flood optic configuration. White housing.	15,840	11,088	150W	12.5A	Flood	18"	2
FT-MB-2.15-FT-B	30 LED MiniBrow. 17.5" length. FireTech Combination spot and flood optic configuration. Black housing.	15,840	11,088	150W	12.5A	Combo	18"	2
FT-MB-2.15-FT-W	30 LED MiniBrow. 17.5" length. FireTech Combination spot and flood optic configuration. White housing.	15,840	11,088	150W	12.5A	Combo	18"	2
FT-MB-2.18-S-B	36 LED MiniBrow. 21" length. 10 degree spot optic configuration. Black housing.	19,008	13,361.60	180W	15A	Spot	21"	3
FT-MB-2.18-S-W	36 LED MiniBrow. 21" length. 10 degree spot optic configuration. White housing.	19,008	13,361.60	180W	15A	Spot	21"	3

Model / Order Number	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @12v DC	Beam Pattern	Length	# of Mounting Feet
FT-MB-2.18-F-B	36 LED MiniBrow. 21" length. 60 degree flood optic configuration. Black housing.	19,008	13,361.60	180W	15A	Flood	21"	3
FT-MB-2.18-F-W	36 LED MiniBrow. 21" length. 60 degree flood optic configuration. White housing.	19,008	13,361.60	180W	15A	Flood	21"	3
FT-MB-2.18-FT-B	36 LED MiniBrow. 21" length. FireTech Combination spot and flood optic configuration. Black housing.	19,008	13,361.60	180W	15A	Combo	21"	3
FT-MB-2.18-FT-W	36 LED MiniBrow. 21" length. FireTech Combination spot and flood optic configuration. White housing.	19,008	13,361.60	180W	15A	Combo	21"	3
FT-MB-2.27-S-B	54 LED MiniBrow. 30" length. 10 degree spot optic configuration. Black housing.	28,512	19,958	270W	22.5A	Spot	30"	3
FT-MB-2.27-S-W	54 LED MiniBrow. 30" length. 10 degree spot optic configuration. White housing.	28,512	19,958	270W	22.5A	Spot	30"	3
FT-MB-2.27-F-B	54 LED MiniBrow. 30" length. 60 degree flood optic configuration. Black housing.	28,512	19,958	270W	22.5A	Flood	30"	3
FT-MB-2.27-F-W	54 LED MiniBrow. 30" length. 60 degree flood optic configuration. White housing.	28,512	19,958	270W	22.5A	Flood	30"	3
FT-MB-2.27-FT-B	54 LED MiniBrow. 30" length. FireTech Combination spot and flood optic configuration. Black housing.	28,512	19,958	270W	22.5A	Combo	30"	3
FT-MB-2.27-FT-W	54 LED MiniBrow. 30" length. FireTech Combination spot and flood optic configuration. White housing.	28,512	19,958	270W	22.5A	Combo	30"	3
FT-MB-2.36-S-B	72 LED MiniBrow. 40" length. 10 degree spot optic configuration. Black housing.	38,016	26,611.20	360W	30A	Spot	40"	4
FT-MB-2.36-S-W	72 LED MiniBrow. 40" length. 10 degree spot optic configuration. White housing.	38,016	26,611.20	360W	30A	Spot	40"	4
FT-MB-2.36-F-B	72 LED MiniBrow. 40" length. 60 degree flood optic configuration. Black housing.	38,016	26,611.20	360W	30A	Flood	40"	4
FT-MB-2.36-F-W	72 LED MiniBrow. 40" length. 60 degree flood optic configuration. White housing.	38,016	26,611.20	360W	30A	Flood	40"	4
FT-MB-2.36-FT-B	72 LED MiniBrow. 40" length. FireTech Combination spot and flood optic configuration. Black housing.	38,016	26,611.20	360W	30A	Combo	40"	4
FT-MB-2.36-FT-W	72 LED MiniBrow. 40" length. FireTech Combination spot and flood optic configuration. White housing.	38,016	26,611.20	360W	30A	Combo	40"	4
FT-MB-2.45-S-B	90 LED MiniBrow. 49.5" length. 10 degree spot optic configuration. Black housing.	47,520	33,264	450W	37.5A	Spot	50"	6
FT-MB-2.45-S-W	90 LED MiniBrow. 49.5" length. 10 degree spot optic configuration. White housing.	47,520	33,264	450W	37.5A	Spot	50"	6
FT-MB-2.45-F-B	90 LED MiniBrow. 49.5" length. 60 degree flood optic configuration. Black housing.	47,520	33,264	450W	37.5A	Flood	50"	6
FT-MB-2.45-F-W	90 LED MiniBrow. 49.5" length. 60 degree flood optic configuration. White housing.	47,520	33,264	450W	37.5A	Flood	50"	6
FT-MB-2.45-FT-B	90 LED MiniBrow. 49.5" length. FireTech Combination spot and flood optic configuration. Black housing.	47,520	33,264	450W	37.5A	Combo	50"	6
FT-MB-2.45-FT-W	90 LED MiniBrow. 49.5" length. FireTech Combination spot and flood optic configuration. White housing.	47,520	33,264	450W	37.5A	Combo	50"	6